


## 12 Dimensions and Weights

### MDM1516/MDM1518 3-5 HP

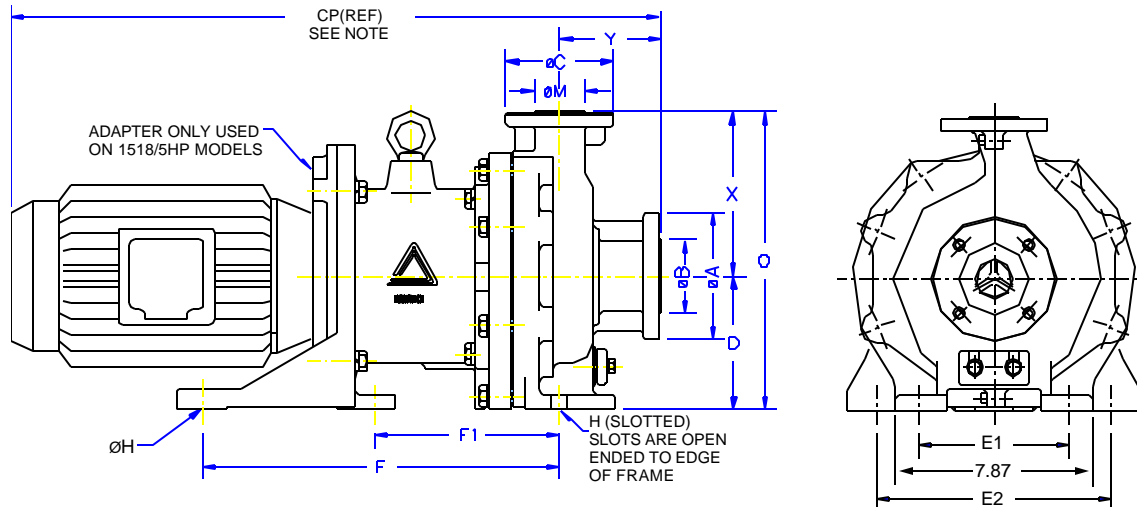


Dimensions in inches (mm)

Note: Varies according to motor manufacturer.

Model	HP/Frame	CP(REF)	D	E1	E2	F	F1	H	O	X	Y
1516	3/182TC	29.0 (736.6)	5.25 (133)	5.98 (152)	9.45 (240)	14.09 (357.8)	7.24 (184)	0.63 (16)	11.76 (298.7)	6.50 (165)	4.00 (101.6)
1518	5/184TC	30.0 (762)	5.25 (133)	5.98 (152)	9.45 (240)	14.08 (357.6)	7.28 (185)	0.63 (16)	11.76 (298.7)	6.50 (165)	4.00 (101.6)

### MDM1518 7.5 HP

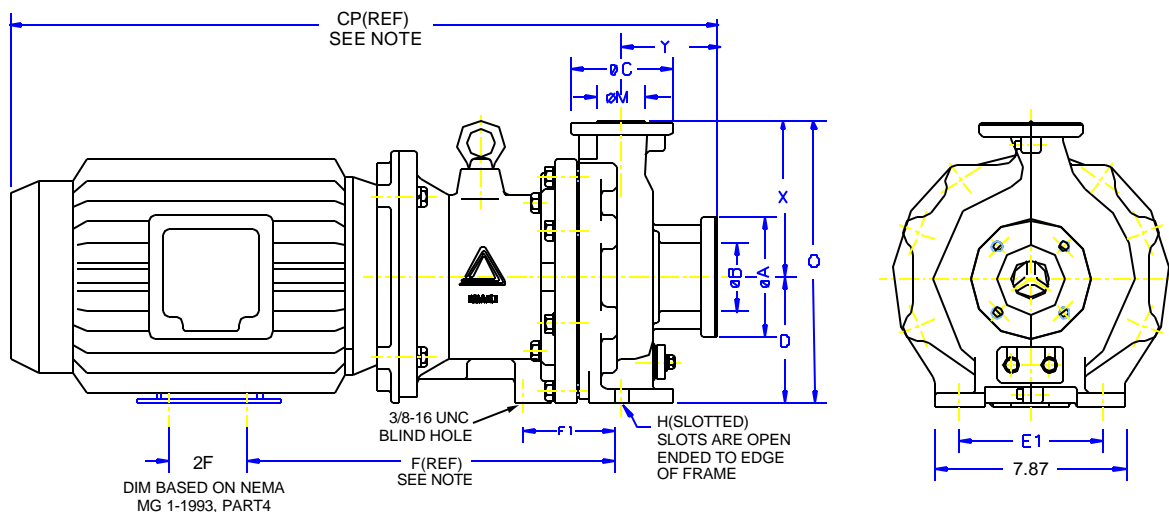


Dimensions in inches (mm)

Note: Varies according to motor manufacturer.

Model	HP/Frame	CP(REF)	D	E1	F(REF)	F1	2F	H	O	X	Y
1518	7.5/213TC 10/215TC	33.5 (850.9)	5.25 (133.3)	5.98 (152)	14.47 (367.5)	4.09 (104)	7.00 (177.8)	0.63 (16)	11.756 (298.6)	6.50 (165)	4.00 (101.6)

### MDM2156/2526 3-5 HP

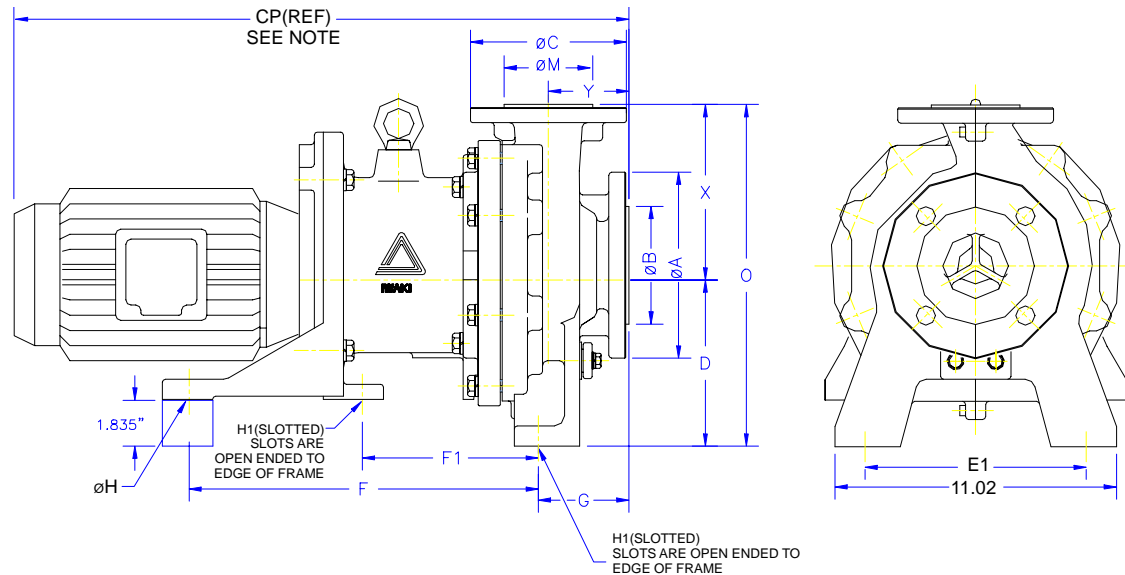


Dimensions in inches

Note: Varies according to motor manufacturer

Model	HP/Frame	CP(REF)	D	E1	F	F1	G	H	H1	O	X	Y
2156	5/184TC	29 (736.6)	7.09 (180)	8.66 (220)	13.68 (347.5)	6.89 (177.5)	3.54 (90)	0.63 (16)	0.55 (14)	13.39 (340)	6.30 (160)	3.15 (79)
2526		29 (736.6)	7.09 (180)	8.66 (220)	13.68 (347.5)	6.89 (177.5)	3.54 (90)	0.63 (16)	0.55 (14)	13.39 (340)	6.30 (160)	3.15 (79)

### MDM2156/2526 7.5-10 HP

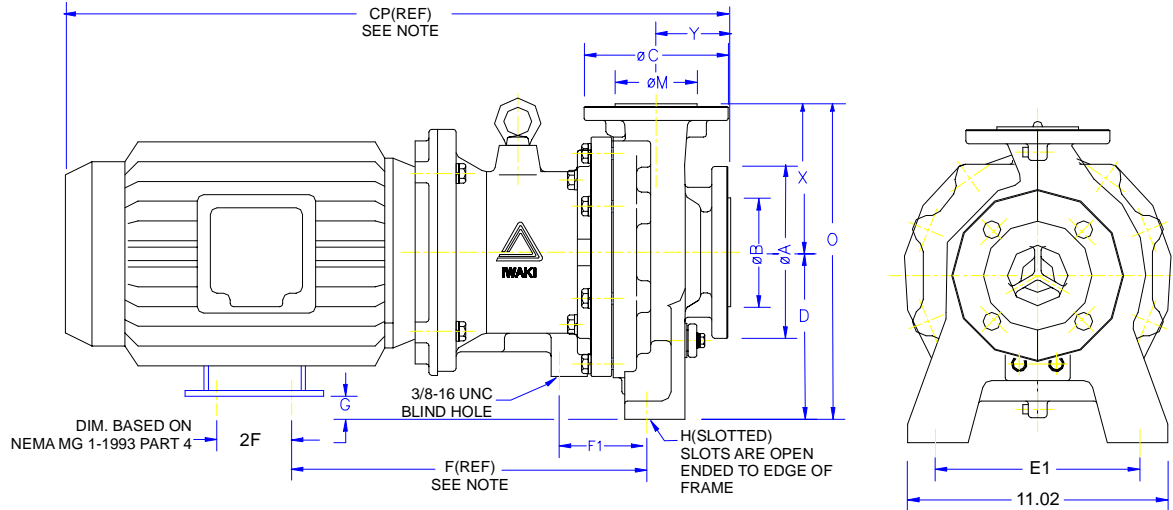


Dimensions in inches

Note: Varies according to motor manufacturer

Model	HP/Frame	CP(REF)	D	E1	E2	F	F1	2F	G	H	O	X	Y
2156	7.5/10 213/215TC	31.0 (787.4)	7.09 (180)	8.66 (220)	11.02 (280)	14.45 (367)	3.70 (94)	5.00/7.00 (127/177.8)	1.83 (46.5)	0.55 (14)	13.39 (340)	6.30 (160)	3.15 (80)
2526		31.0 (787.4)	7.09 (180)	8.66 (220)	11.02 (280)	14.45 (367)	3.70 (94)	7.00 (177.8)	1.83 (46.5)	.055 (14)	13.39 (340)	6.30 (160)	3.15 (80)

**MDM326 7.5-20HP**

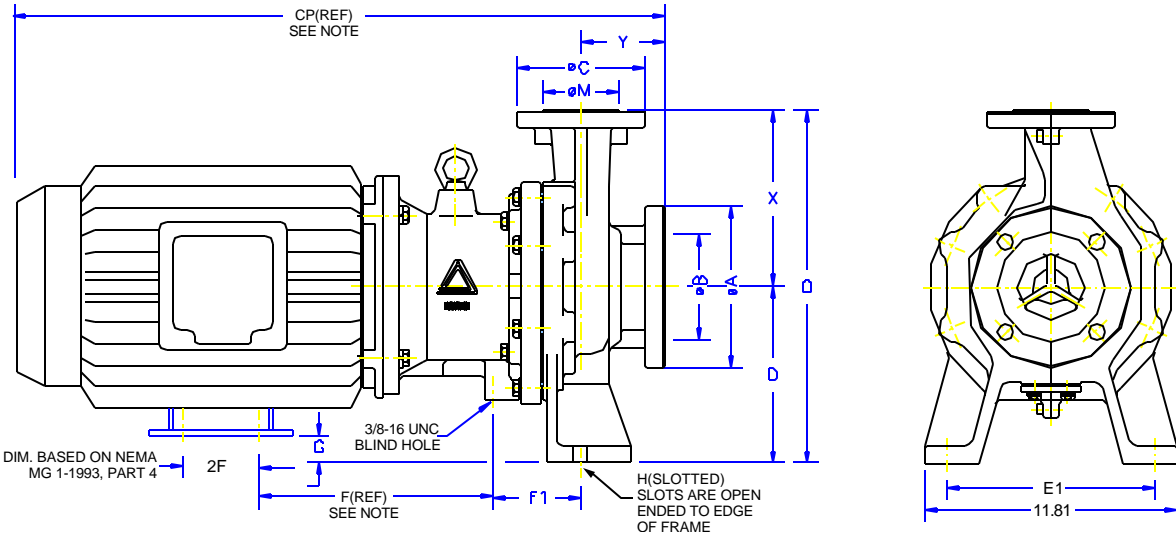

Dimensions in inches

Note: Varies according to motor manufacturer

Model	HP-Frame	CP(REF)	D	E1	F	F1	2F	G	H	O	X	Y
326	7.5-213TC	31.0	8.25	9.76	14.46	4.09	7.0	2.99	0.63	16.5	8.25	4.0
	10.0-215TC	(787.4)	(209.5)	(248)	(367.3)	(104)	(177.8)	(75.9)	(16)	(419)	(209.6)	(101.6)
	15-254TC	36.0	8.25	9.76	14.97	4.09	8.25	1.99	0.63	16.5	8.25	4.0
	20-256TC	(914.4)	(209.5)	(248)	(380.2)	(104)	10.0	(50.5)	(16)	(419)	(209.6)	(101.6)
							(254)					